

Wall Base



Wall Base

When you only want the best, we'll be there.



Wall Base

Congratulations

You have chosen the right Wall Base. VPI Wall Base. Available in vinyl or TPR (rubber). A product with the kind of agility you need to bring your unique interior designs to life. A product with enough muscle to tackle the most daunting applications. A product with a level of endurance that assures your creative vision will last a lifetime whether installed in an office, conference room, classroom, or hallway. Superb flexibility. Scratch and scuff resistant. Meeting stringent specifications that exceed industry norms. Quality control check points throughout each phase of production. Superior performance properties that meet the collective needs of both designers and installers. These are the reasons you have made the right choice.

FEATURES

Lead & Heavy Metals Free



Ribbed Back Design

For more secure adhesion

Porous Backed Construction

Allows quicker, better adhesion

UV Resistant

Won't fade like some other products on the market

Tougher Surface Finish

Looks better longer because of thicker, denser pigmentation

Quick, Easy Installation

Due to superior flexibility, VPI Wall Base is quick and easy to install

Matching Outside Corners

Unlike other brands, VPI outside corners are guaranteed to match every time

Micro-Squared™ "UP" Cut

Minimizes joint visibility

No Color Drift

Stable color consistency over time unlike some other products on the market (Even more important when installing preformed corners)

Reinforced Cove

For greater durability in the toughest applications

Complies with ASTM Standards

For flame spread (ASTM E84), smoke density and development (ASTM E662), critical radiant flux (ASTM 648), and for hardness, dimensional stability and chemical resistance (ASTM F1861)

SPECIFICS

Rubber (TPR)

3/8" Gauge


Vinyl

3/8" and .080" Gauge


Rolls or Lengths

2 1/2", 4", or 6" heights

Cove (Toe) or **Straight** (Toeless)



As a standard VPI design feature, the reinforced toe provides additional strength for tougher applications.




To ease installation and ensure a snug fit from top to toe, VPI Wall Base has a ribbed back forming a mechanical key for positive and lasting adhesion.


Product Standards That Lead the Industry




Wall Base

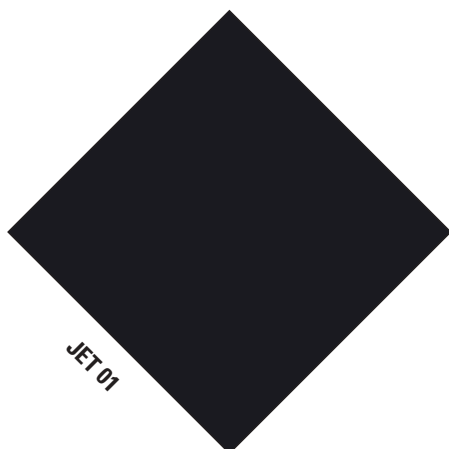


JET 01

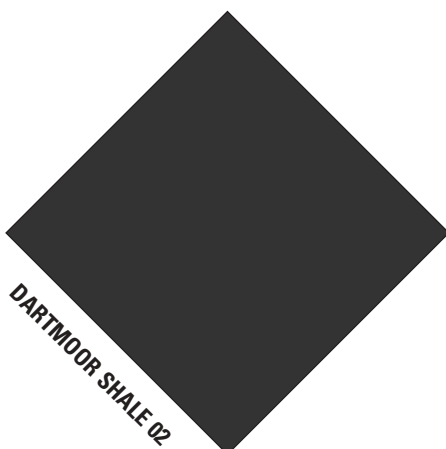


DARTMOOR SHALE 02

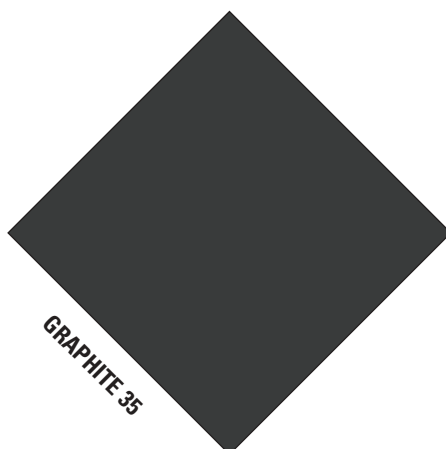


GRAPHITE 35

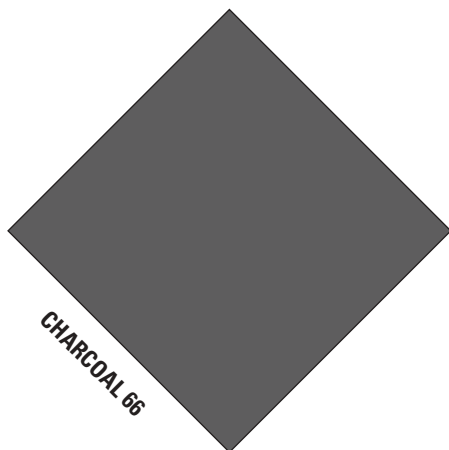


CHARCOAL 66

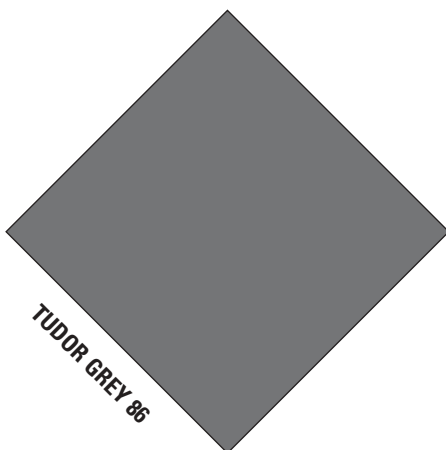


TUDOR GREY 86

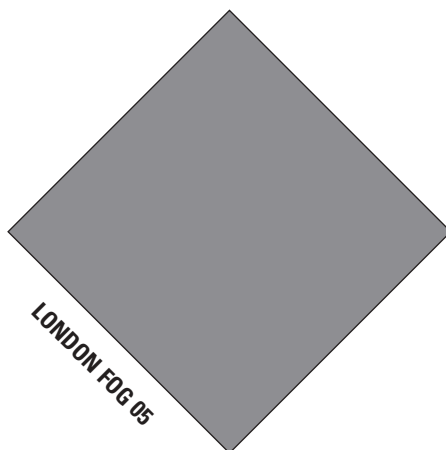


LONDON FOG 05

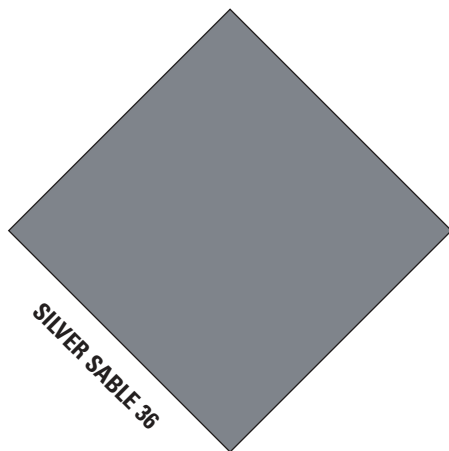


SILVER SABLE 36

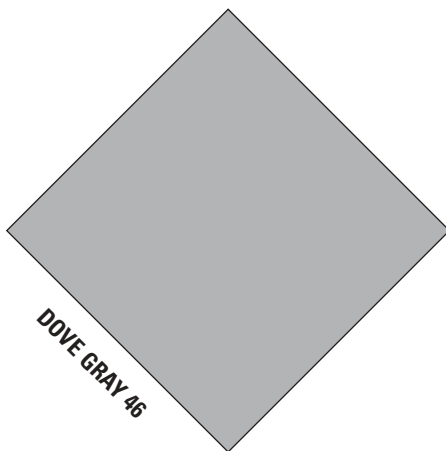

DOVE GRAY 46

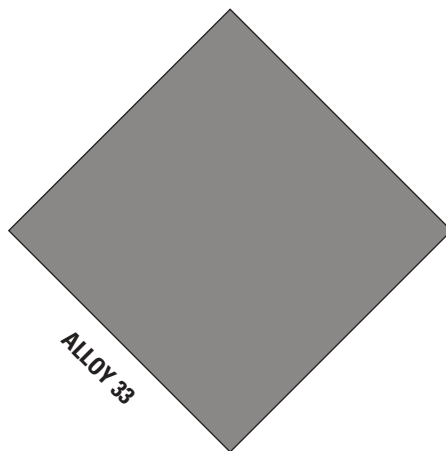

ALLOY 33

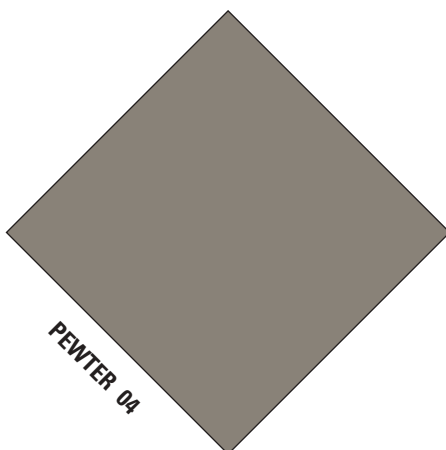


PEWTER 04

All colors available in:


- TPR (rubber) or Vinyl
- Heights of 2½", 4" or 6"
- Cove (toe) or Straight (toeless)
- 4' lengths or 96', 120' and 160' rolls
- ½" Gauge (TPR rubber or Vinyl)
- .080" Gauge (Vinyl)

Note: Due to color variations in printing, please refer to actual samples for accurate color.


Wall Base

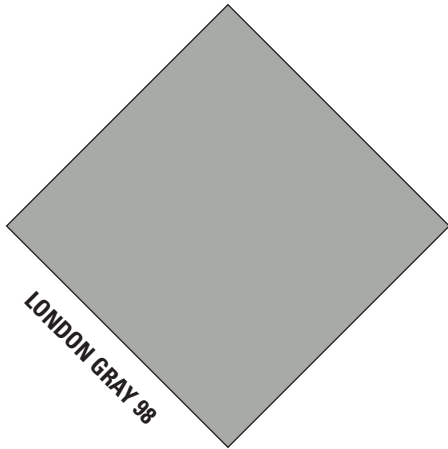


LONDON GRAY 98

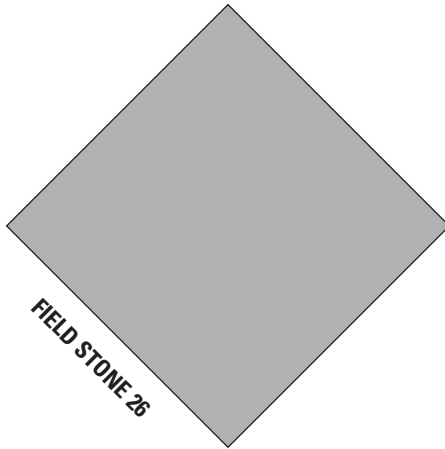


FIELD STONE 26

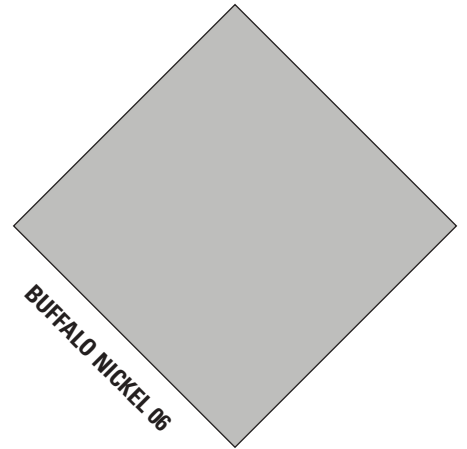


BUFFALO NICKEL 06

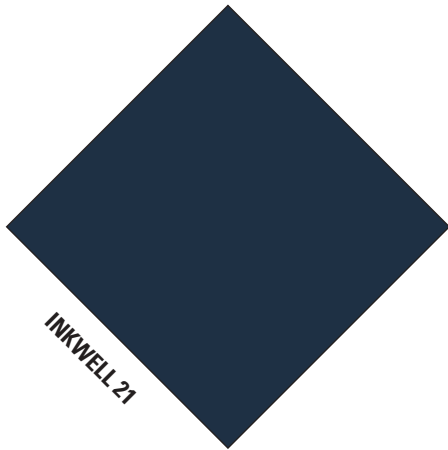


INKWELL 21

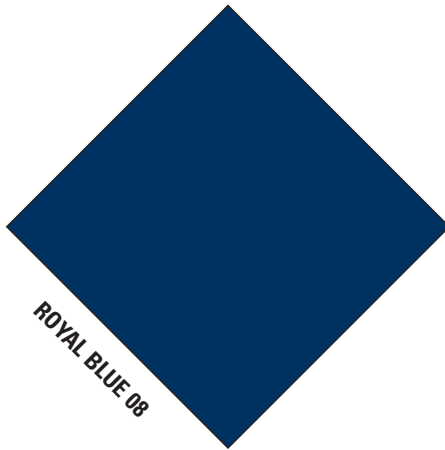


ROYAL BLUE 08

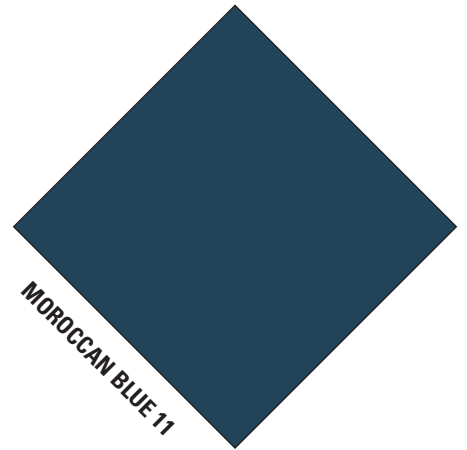


MOROCCAN BLUE 11

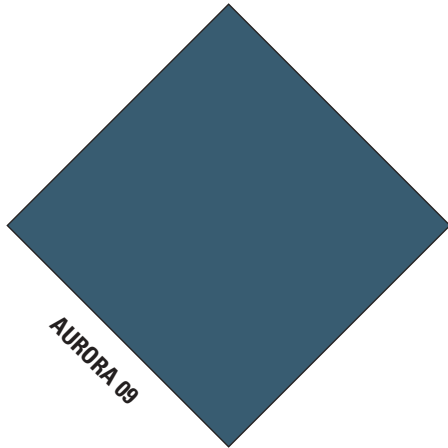


AURORA 09

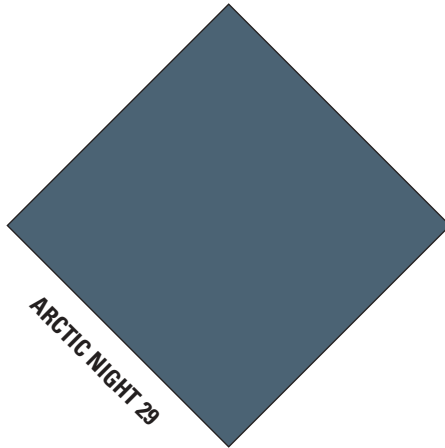

ARCTIC NIGHT 29

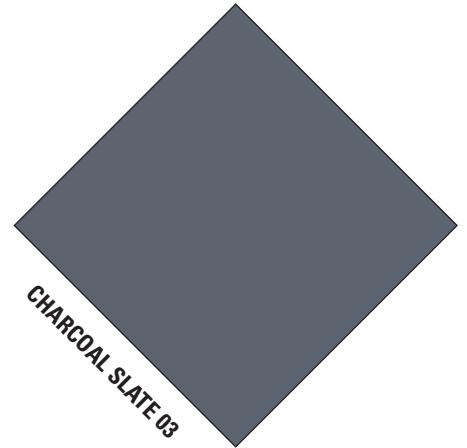


CHARCOAL SLATE 03

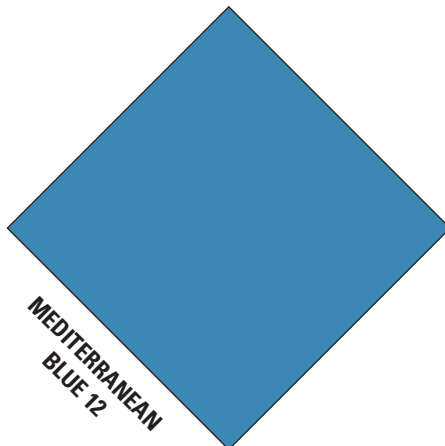


MEDITERRANEAN BLUE 12

All colors available in:


- TPR (rubber) or Vinyl
- Heights of 2½", 4" or 6"
- Cove (toe) or Straight (toeless)
- 4' lengths or 96', 120' and 160' rolls
- ½" Gauge (TPR rubber or Vinyl)
- .080" Gauge (Vinyl)

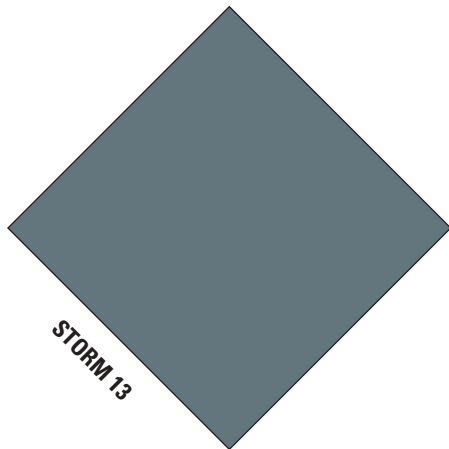


STORM 13

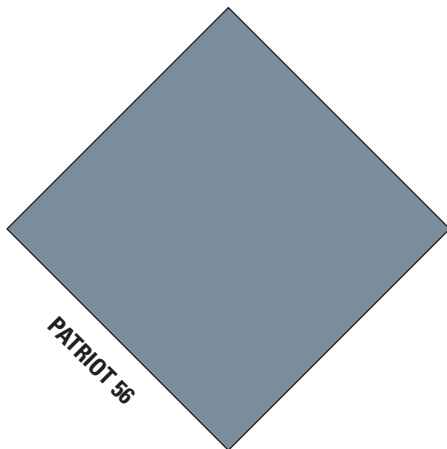


PATRIOT 56

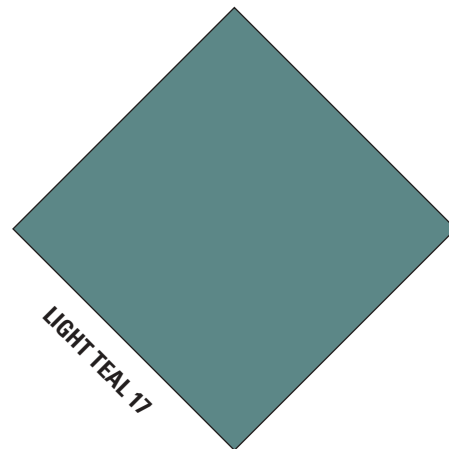


LIGHT TEAL 17

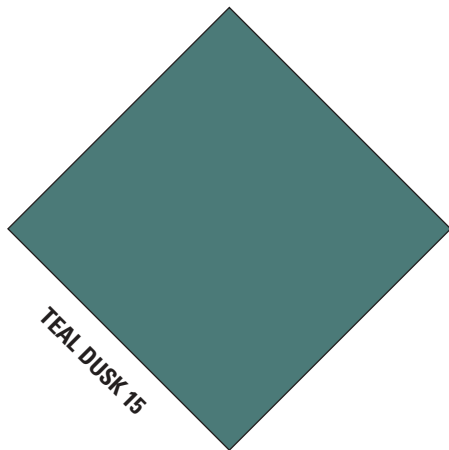


TEAL DUSK 15

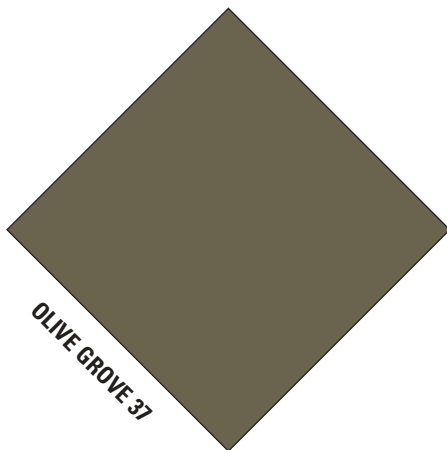


OLIVE GROVE 37

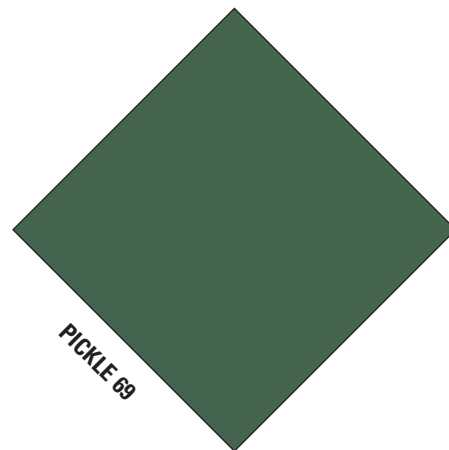


PICKLE 69

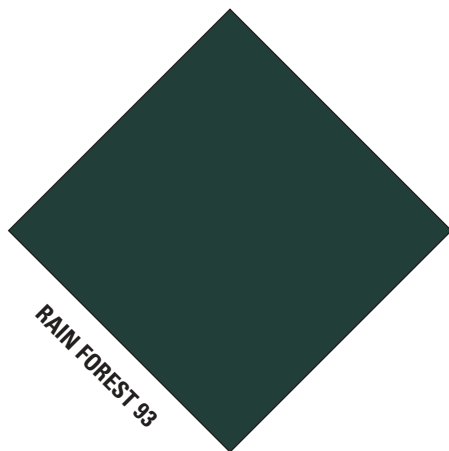


RAIN FOREST 93

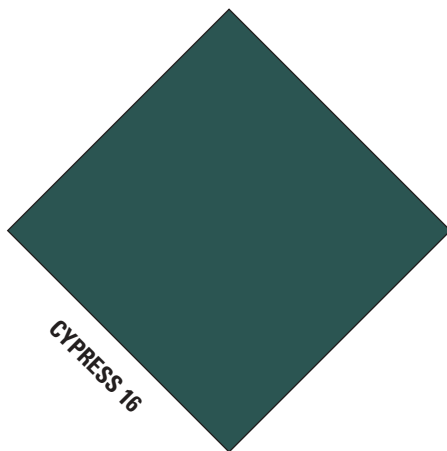

CYPRESS 16

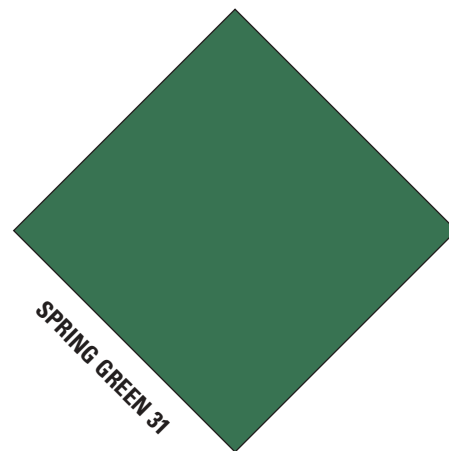


SPRING GREEN 31

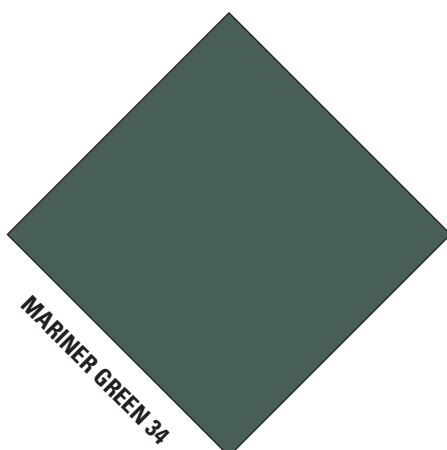


MARINER GREEN 34

Note: Due to color variations in printing, please refer to actual samples for accurate color.


Wall Base

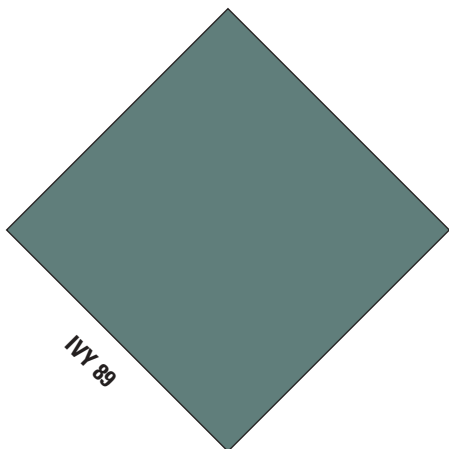


IVY 89

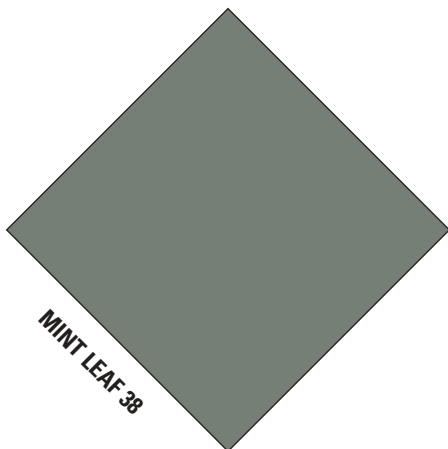


MINT LEAF 38

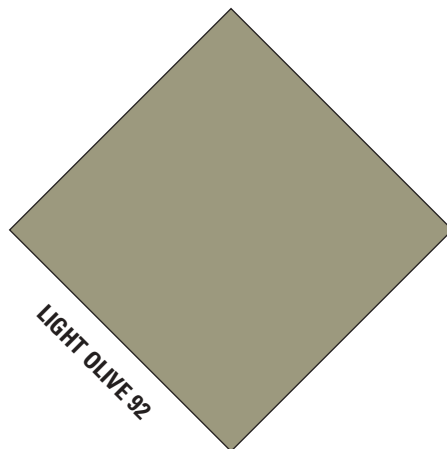


LIGHT OLIVE 92

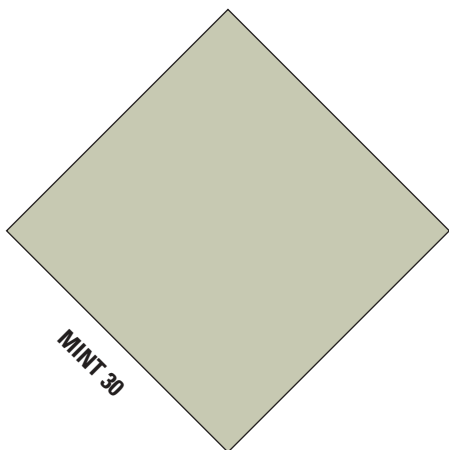


MINT 30

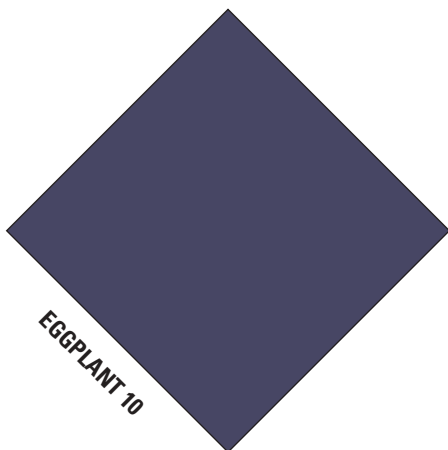


EGGPLANT 10

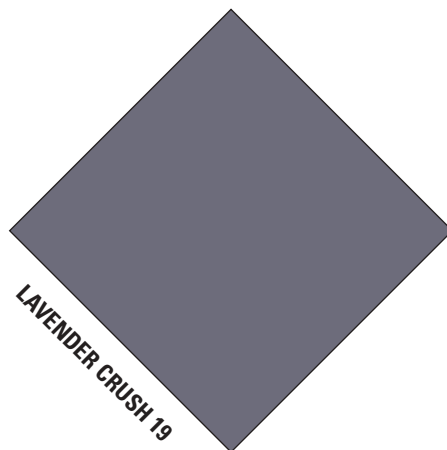


LAVENDER CRUSH 19

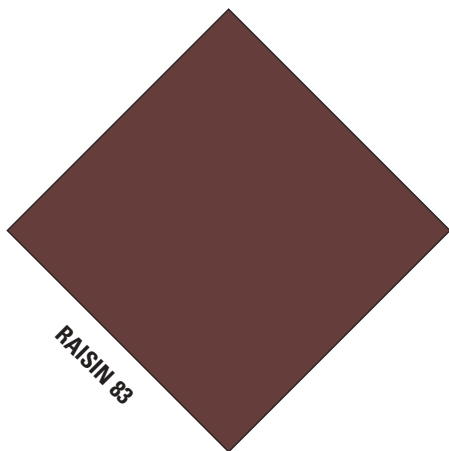


RAISIN 83

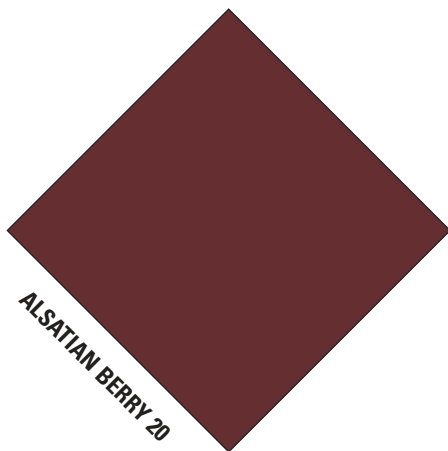

ALSATIAN BERRY 20

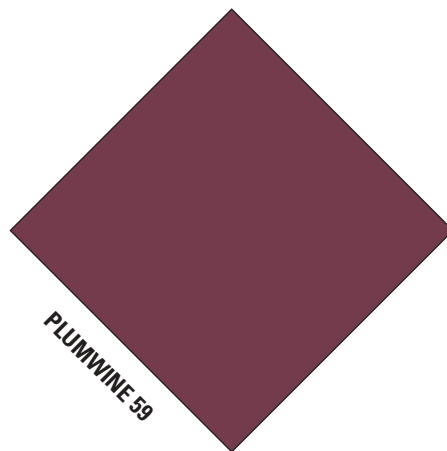


PLUMWINE 59

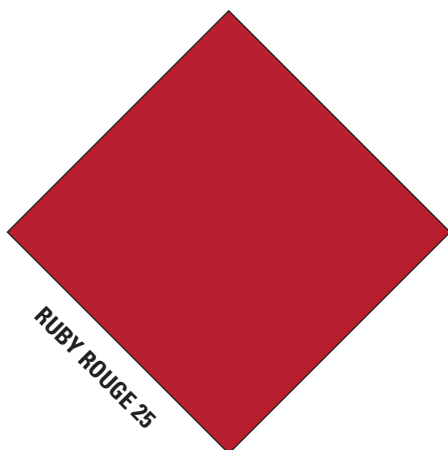


RUBY ROUGE 25

All colors available in:


- TPR (rubber) or Vinyl
- Heights of 2½", 4" or 6"
- Cove (toe) or Straight (toeless)
- 4' lengths or 96', 120' and 160' rolls
- ½" Gauge (TPR rubber or Vinyl)
- .080" Gauge (Vinyl)

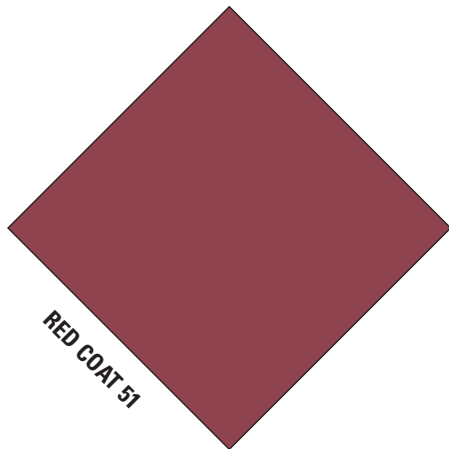


RED COAT 51

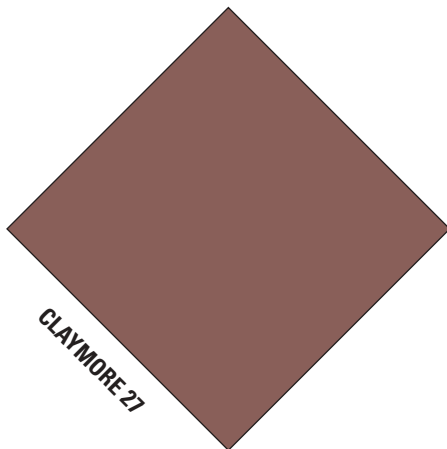


CLAYMORE 27

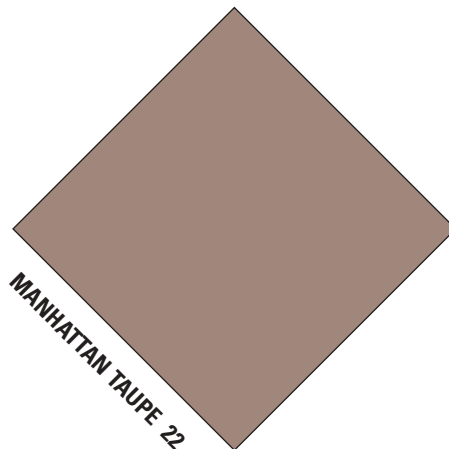


MANHATTAN TAUPE 22

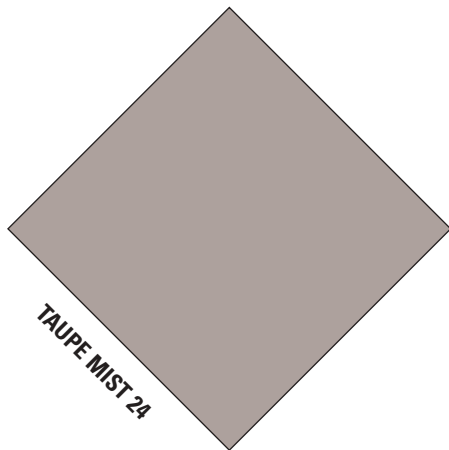


TAUPE MIST 24

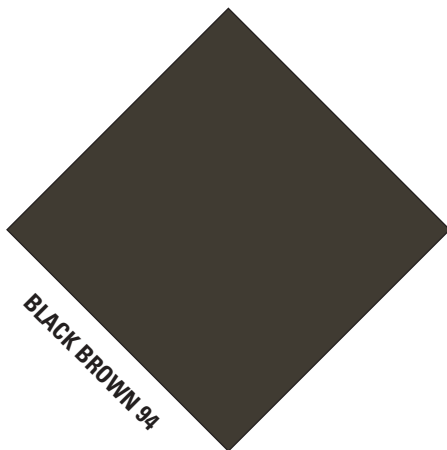


BLACK BROWN 94

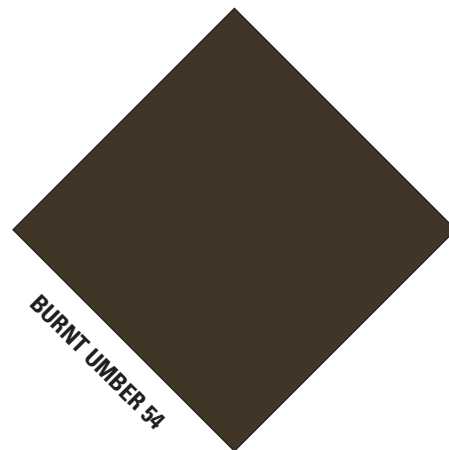


BURNT UMBER 54

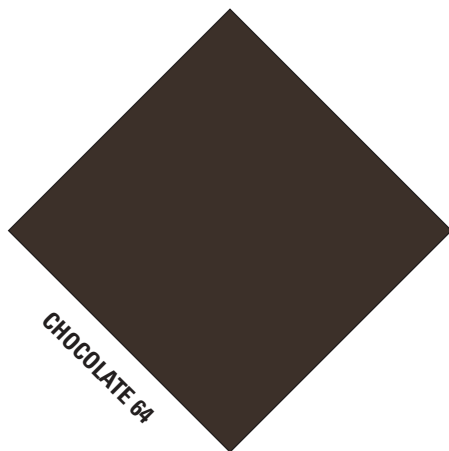


CHOCOLATE 64

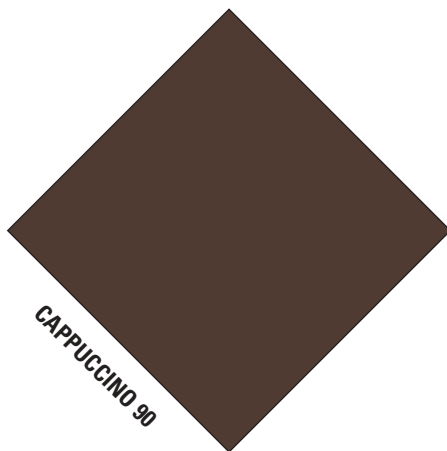

CAPPUCINO 90

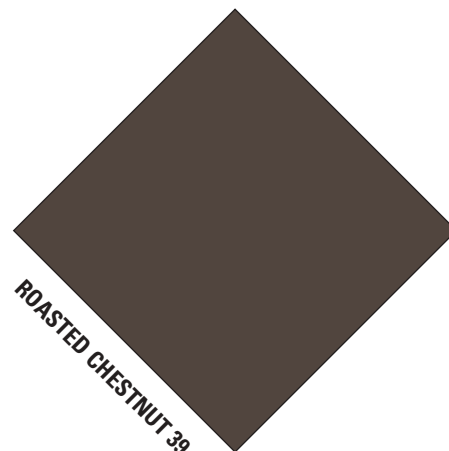


ROASTED CHESTNUT 39

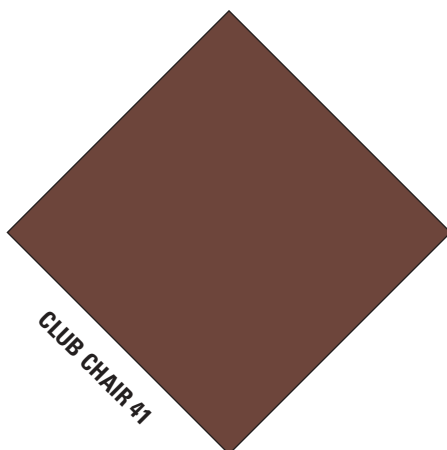


CLUB CHAIR 41

Note: Due to color variations in printing, please refer to actual samples for accurate color.


Wall Base

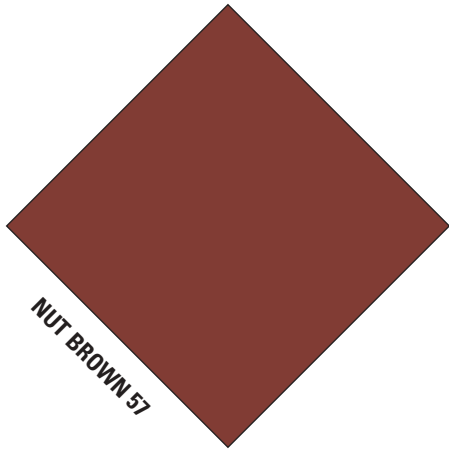


NUT BROWN 57

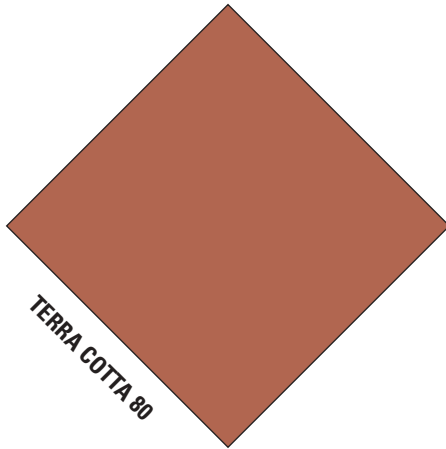


TERRA COTTA 80

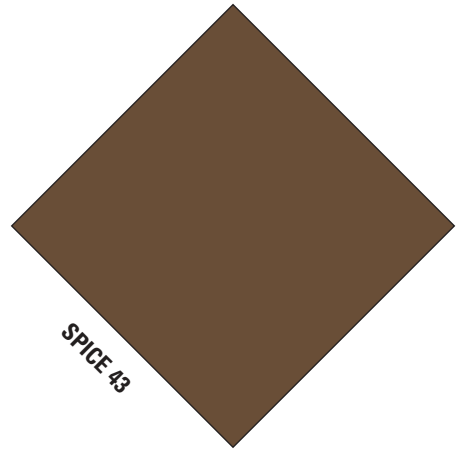


SPICE 43

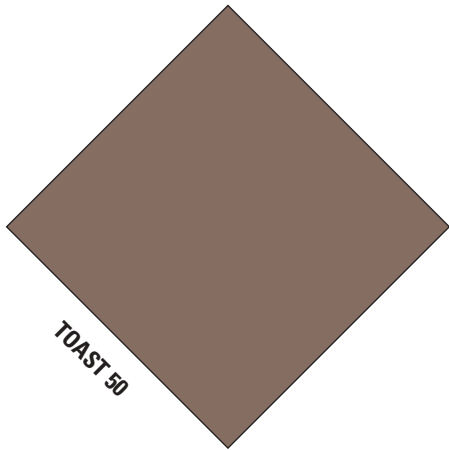


TOAST 50

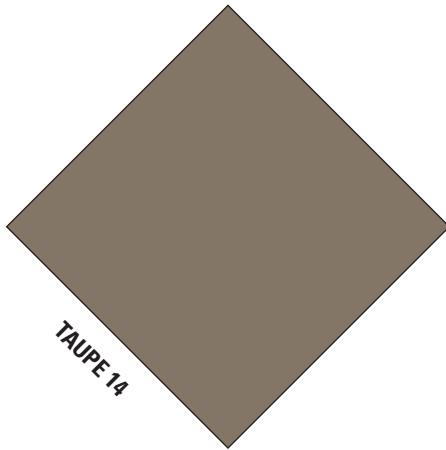


TAUPE 14

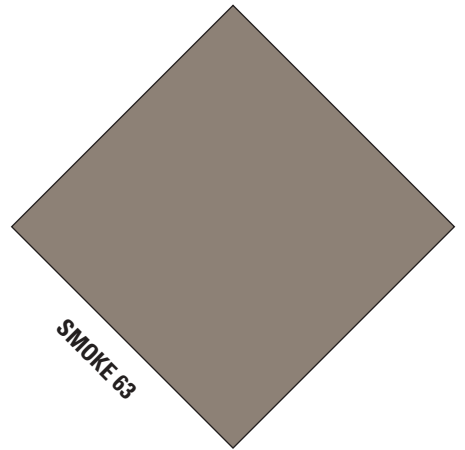


SMOKE 63

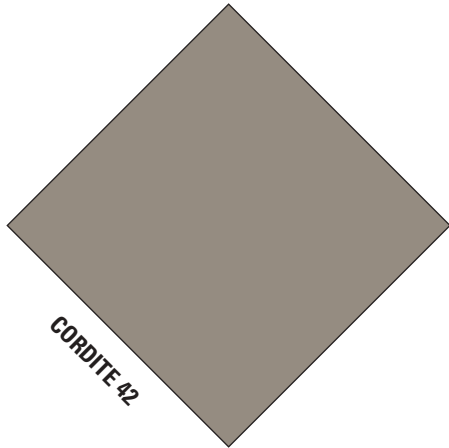


CORDITE 42

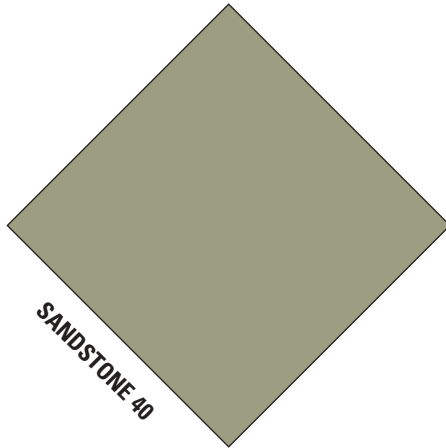

SANDSTONE 40

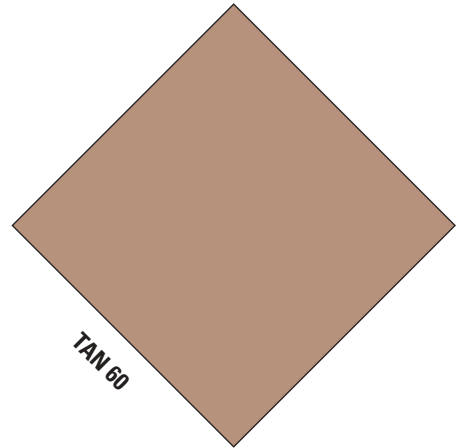


TAN 60

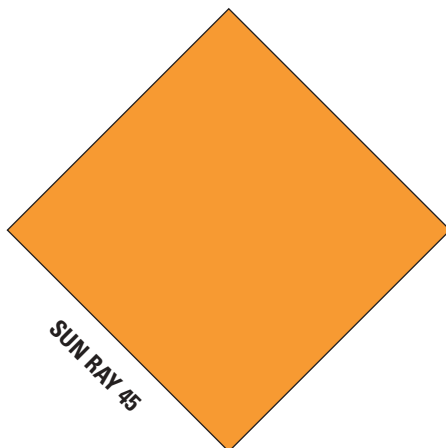


SUN RAY 45

All colors available in:


- TPR (rubber) or Vinyl
- Heights of 2½", 4" or 6"
- Cove (toe) or Straight (toeless)
- 4' lengths or 96', 120' and 160' rolls
- ½" Gauge (TPR rubber or Vinyl)
- .080" Gauge (Vinyl)

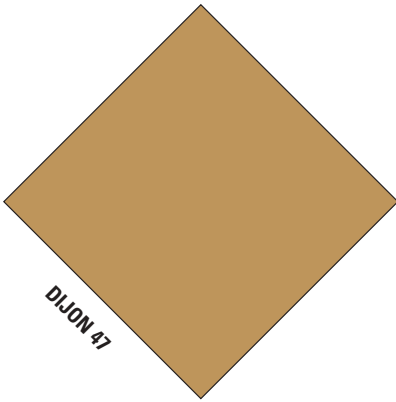


DIJON 47

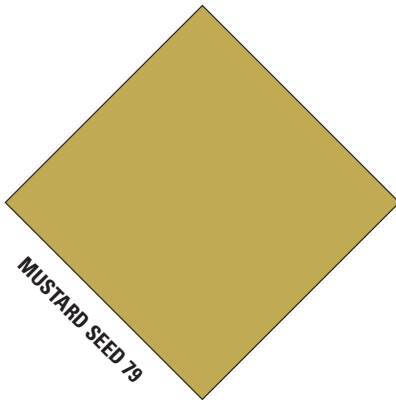


MUSTARD SEED 79

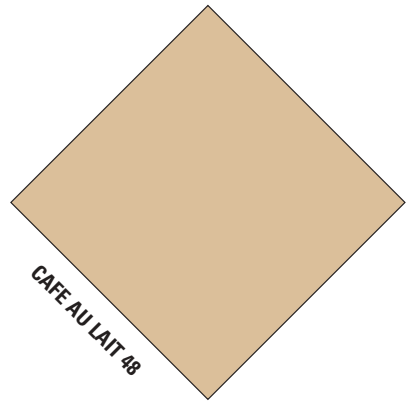


CAFE AU LAIT 48

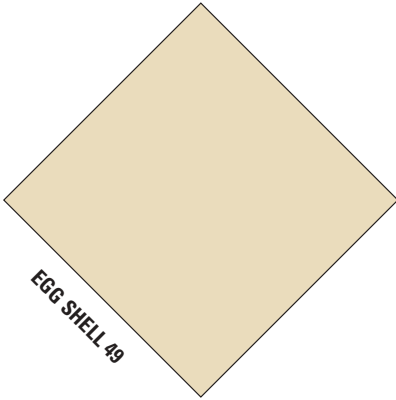


EGG SHELL 49

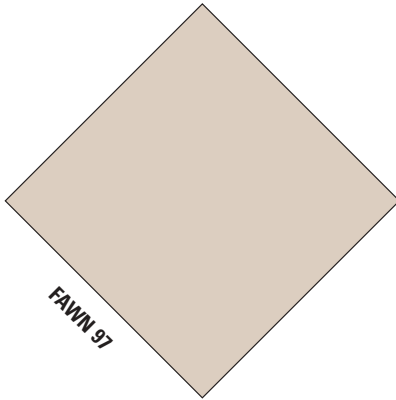


FAWN 97

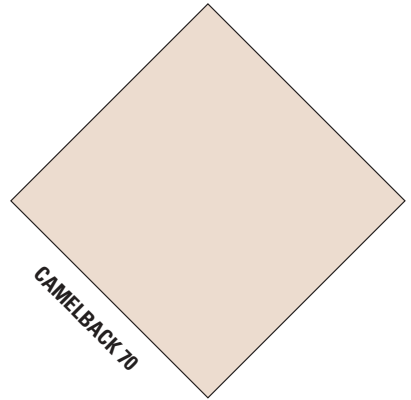


CAMELBACK 70

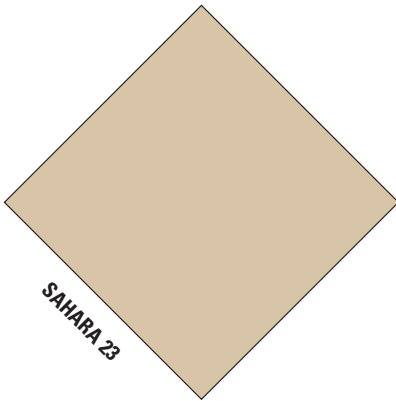


SAHARA 23

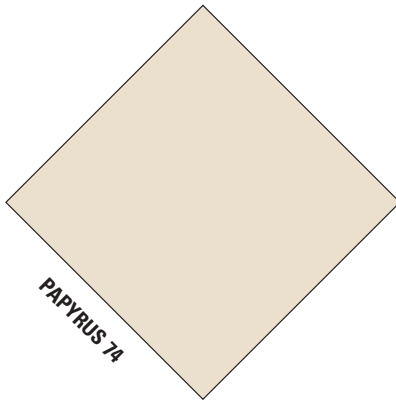

PAPYRUS 74

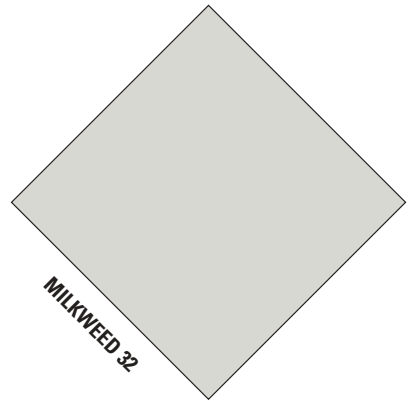

MILKWEEED 32

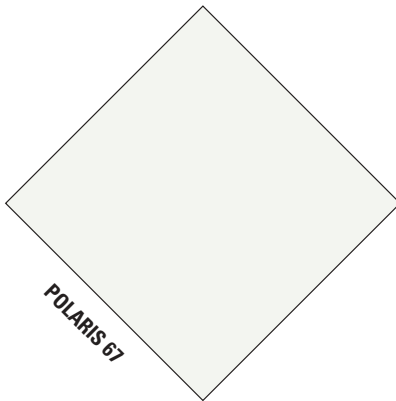

POLARIS 67

Note: Due to color variations in printing, please refer to actual samples for accurate color.

Specifications



PROPERTY	VINYL – Wall Base	TPR (RUBBER) – Wall Base
TEST DATA		
ASTM 1861-02	Conforms	Conforms
Flame Propagation (UL 992)	<2.0	<2.0
Smoke Density Test (ASTM E 662)	<450	<450
Critical Radiant Flux (ASTM E 648 or NFPA 253)	Class I (>0.45 W/cm ²)	Class I (>0.45 W/cm ²)
CONSTRUCTION		
Composition	High grade resin, thermoplastic binders, fillers, and pigments	High grade resin, thermoplastic binders, fillers, and pigments
Gauge	1/8"	1/8"
Lengths	4' lengths or 120' roll 6" Wall Base in 96' lengths or rolls	4' lengths or 160' roll 6" Wall Base in 96' lengths or rolls
Height	2 1/2", 4", 6"	2 1/2", 4", 6"
Style	Cove or Straight Toe	Cove or Straight Toe
Corners	2 1/2", 4", 6"	2 1/2", 4", 6"
INSTALLATION		
Adhesive & Spread Rate	#600 Wall Base Adhesive; Covers approximately: 75 linear feet of 4" base per 30 oz. cartridge 275 linear feet of 4" base per gallon 1100 linear feet of 4" base per 4 gallon container	#600 Wall Base Adhesive; Covers approximately: 75 linear feet of 4" base per 30 oz. cartridge 275 linear feet of 4" base per gallon 1100 linear feet of 4" base per 4 gallon container
Trowel Size	3/32" x 3/32" triangular notch with 3/32" flats. If applying adhesive with cartridge gun, use a 2-hole nozzle for a 2 1/2", 3-hole nozzle for a 4", and a 5-hole nozzle for 6".	3/32" x 3/32" triangular notch with 3/32" flats. If applying adhesive with cartridge gun, use a 2-hole nozzle for a 2 1/2", 3-hole nozzle for a 4", and a 5-hole nozzle for 6".
WARRANTY		
One Year*		

* The use of any other adhesive will void VPI's warranty.

Preformed corners available for all VPI Wall Base (30 corners per carton).

GENERAL	EXECUTION
<p>REFERENCES</p> <p>A. ASTM F 1861-02: Wall Base</p> <p>WARRANTY</p> <p>A. Provide manufacturer's warranty under provisions of Section [01700.] [01740.]</p> <p>B. Warranty: Include one year warranty that products are free from defects in materials and workmanship.</p> <p>PRODUCTS</p> <p>ACCEPTABLE MANUFACTURERS</p> <p>A. VPI Corporation (VPI), P.O. Box 451, Sheboygan, WI 53082-0451</p> <p>FLOOR COVERING MATERIALS</p> <p>A. Base: [ASTM F 1861-02] VPI Wall Base; top set coved, [2 1/2"] [4"] [6"] inches high, [1/4"] [0.080] inch thick, color [selected.] [scheduled.] (Rubber available in 1/8 inch gauge only.)</p> <p>Pricing for wall base is determined by color. Specify color.</p> <p>MANUFACTURING TOLERANCES</p> <p>A. Precision control gauge to assure smooth surface with no high edges.</p> <p>ADHESIVES</p> <p>A. Wall Base adhesive: VPI No. 600 Solvent Free Water Based Acrylic Copolymer Adhesive with zero calculated VOCs.</p>	<p>EXAMINATION</p> <p>A. Ensure contact wall surface to 1/2 inch below top of base is clean and free from dirt, paint, oil, grease, wall covering, old adhesives, and other extraneous substances.</p> <p>B. Beginning of installation means acceptance of surfaces and conditions.</p> <p>INSTALLATION</p> <p>A. Fit top set base joints tight and vertical. Install base on solid backing; adhere tightly to wall surfaces. Miter and form internal and external corners as detailed in manufacturer's installation and maintenance instructions. (www.vpiflooring.com)</p> <p>B. Scribe and fit to door frames and other obstructions.</p> <p>PROTECTION</p> <p>A. Prohibit traffic on finished floor for 48 hours after installation.</p> <p>CLEANING</p> <p>A. Remove excess adhesive from floor, base, and wall surfaces without damage, while adhesive is still wet.</p> <p>B. Clean floor and base surfaces.</p>

GREEN SPECIFICATIONS



VPI Wall Base qualifies for LEED Materials and Resources Credits 4.1 and 4.2: Recycled Content.
VPI #600 Adhesive qualifies for LEED IEQ Credit 4.1: Low Emitting Adhesives and Sealants (Zero VOC's).



For more information visit us at www.vpiflooring.com
Contact us at **800-874-4240** or e-mail floor@vpicorp.com

VPI Corporation
3123 South 9th Street, Sheboygan, WI 53081
Mailing Address:
P.O. Box 451, Sheboygan, WI 53082-0451
Phone: 920-458-4664 Fax: 920-458-1368

